


Pool Filtration



3- FILTRATION SYSTEM "AQUARIUS"

- An exclusive and unique design built with state of the art technology, fully injected 100% food grade Polypropylene guaranteeing maximum reliability and performance. The "Aquarius" range sand filters have been designed and manufactured using only first grade raw materials.
- 100% polypropylene, ball-shaped body with micro-hole pipe distribution. Supporting base of the double-ring filter to ensure stability.
- Polished and glazed wedges finish
- Filtration system with a 6 way top selector valve assembled on a base with pump and prefilter.
- Draining micro-hole pipe distribution
- Max. working pressure: 2.5 bar, Test pressure 4 bar.
- Connection filter-valve with clamping collars.
- 3/4" filter discharge
- Standard: UNI 10637:2006 regulation for TYPE D categories
- Warranty: 5 years.

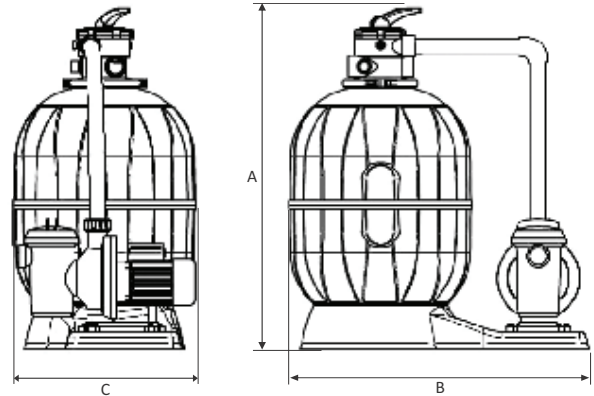

CODE	TYPE	POWER		IN-OUT	FLOW (m ³ /h) V=50m ³ /h/m ²	QUARTZ SAND kg	FILTRATION AREA m ²	DIMENSIONS			PACKING	WEIGHT kg	VOLUME m ³
		HP	kW					A	B	C			
100100916	Top	0.50	0.37	DN50	6	75	0.12	835	830	450	1	20	0.32
100100917	Top	0.75	0.55	DN50	10	100	0.20	985	870	530	1	25	0.46
100100918	Top	1	0.75	DN50	14	150	0.28	1020	915	620	1	30	0.57
107100305	Side	0.50	0.37	DN50	6	75	0.12	705	830	450	1	20	0.32
107100306	Side	0.75	0.55	DN50	10	100	0.20	855	870	530	1	25	0.46
107100307	Side	1	0.75	DN50	14	150	0.28	890	915	620	1	30	0.57